



# KASSETTENPROFILE


## Kassette 90/600

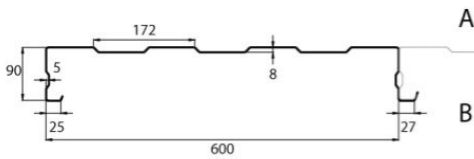


## Kassette 100/600

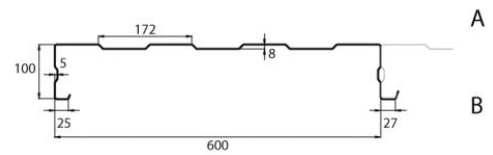


## Kassette 110/600

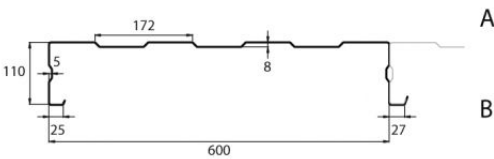


## Kassette 120/600

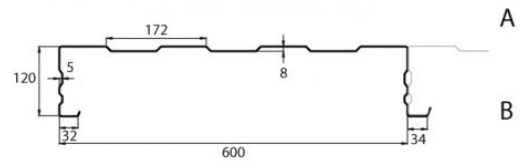


## Kassette 130/600

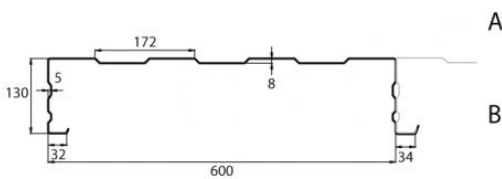


## Kassette 145/600

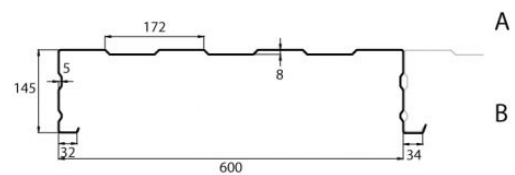


## Kassette 160/600

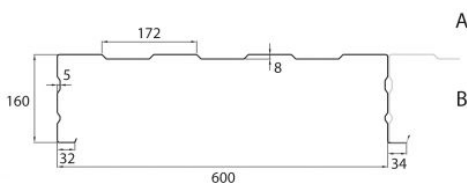

## Kassette 180/600

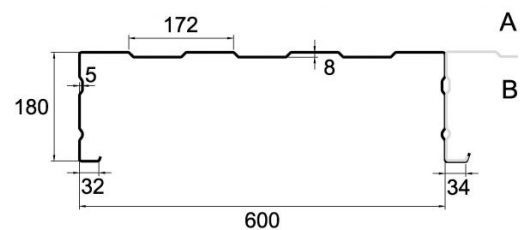

# B90/600 – B180/600

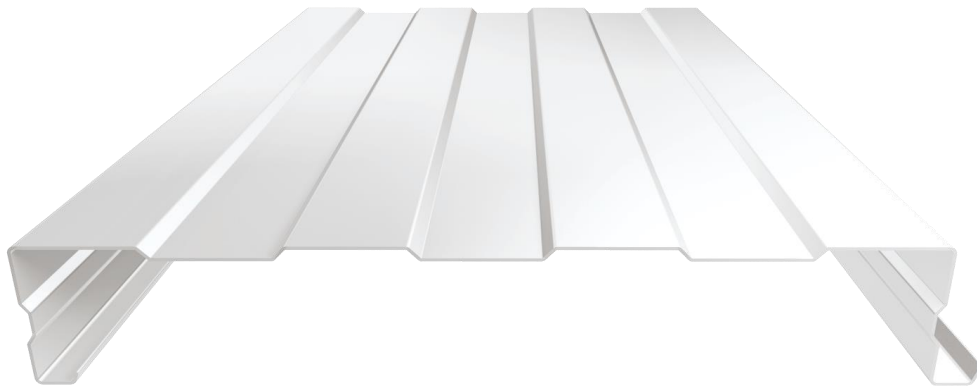

## Produktinformation

Typ	Standardfarben (Rückseite Schutzlack)			max. Stückzahl/Paket Einteilung in 2er Schritten	max. Paketanzahl/LKW		Längenbeschränkung
	15μ	25μ	25/25μ		nebeneinander	aufeinander	
<b>B90/600</b>	9002	9002	--	16	3	3	1.800 – 18.000 mm
<b>B100/600</b>	9002	9002	--	14	3	3	1.800 – 18.000 mm
<b>B110/600</b>	9002	9002	--	12	3	3	1.800 – 18.000 mm
<b>B120/600</b>	9002	9002	--	12	3	3	1.800 – 18.000 mm
<b>B130/600</b>	9002	9002	--	10	3	3	1.800 – 18.000 mm
<b>B145/600</b>	9002	9002	--	10	3	3	1.800 – 18.000 mm
<b>B160/600</b>	9002	9002	--	8	3	3	1.800 – 18.000 mm
<b>B180/600</b>	9002	9002	--	-	3	3	1.800 – 18.000 mm

**Stahlgüte:** Stahl S320 + Z275 oder gleichwertig

**Brandverhalten:** nicht brennbar Klasse A1

**Sonderausführung:** Perforiert  
Dichtband  
thermisches Trennband