
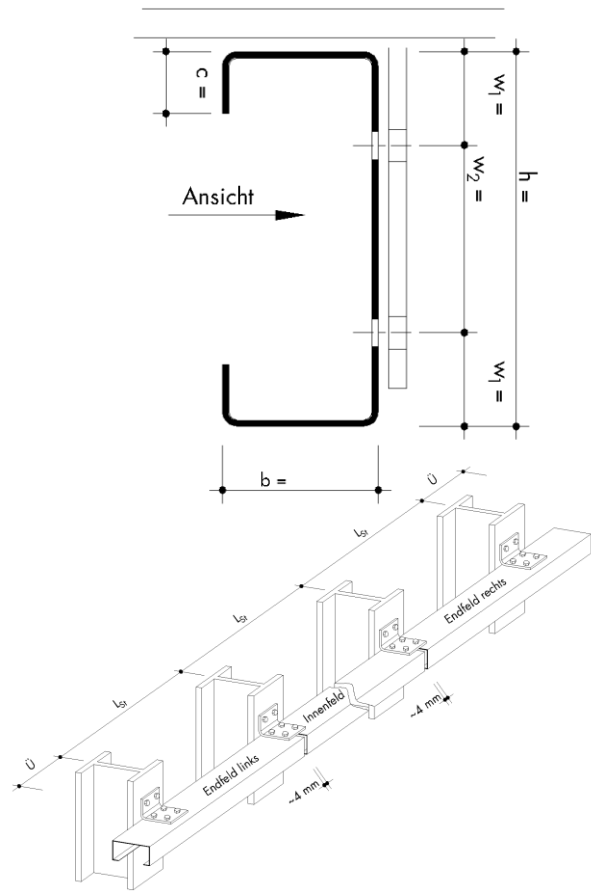


C – WANDRIEGEL

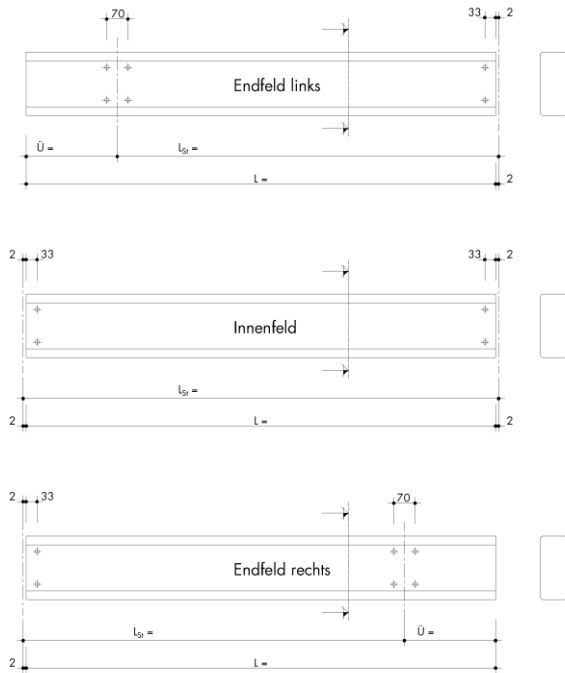

Profil	Dicke (t/mm)	Gewicht (Kg/m)	Steg h (mm)	Lochabstand		Steg b (mm)	Lippe c (mm)	Zuschnitt Z (mm)	Fläche A (cm ²)
				w ₁	w ₂				
C 105	2,00	4,80	105	30	45	80	25	300	6,00
	2,50	6,00	105	30	45	80	27	300	7,50
	3,00	7,20	105	30	45	80	29	300	9,00
C 120	2,00	5,20	120	35	50	90	20	325	6,50
	2,50	6,50	120	35	50	90	22	325	8,13
	3,00	7,80	120	35	50	90	24	325	9,75
C 140	2,00	5,60	140	40	60	90	23	350	7,00
	2,50	7,00	140	40	60	90	25	350	8,75
	3,00	8,40	140	40	60	90	26	350	10,50
C 160	2,00	6,00	160	40	80	90	25	375	7,50
	2,50	7,50	160	40	80	90	27	375	9,38
	3,00	9,00	160	40	80	90	29	375	11,25
C 180	2,00	6,40	180	50	80	90	28	400	8,00
	2,50	8,00	180	50	80	90	30	400	10,00
	3,00	9,60	180	50	80	90	31	400	12,00
C 200	2,00	6,80	200	60	80	100	20	425	8,50
	2,50	8,50	200	60	80	100	22	425	10,63
	3,00	10,20	200	60	80	100	24	425	12,75
C 220	2,00	7,20	220	60	100	100	23	450	9,00
	2,50	9,00	220	60	100	100	25	450	11,25
	3,00	10,80	220	60	100	100	26	450	13,50
C 250	2,50	10,00	250	60	130	110	25	500	12,50
	3,00	12,00	250	60	130	110	27	500	15,00
	3,50	14,00	250	60	130	110	28	500	17,50
	4,00	16,00	250	60	130	110	30	500	20,00
C 300	2,50	11,50	300	75	150	120	27	575	14,38
	3,00	13,80	300	75	150	120	29	575	17,25
	3,50	16,10	300	75	150	120	30	575	20,13
	4,00	18,40	300	75	150	120	32	575	23,00